
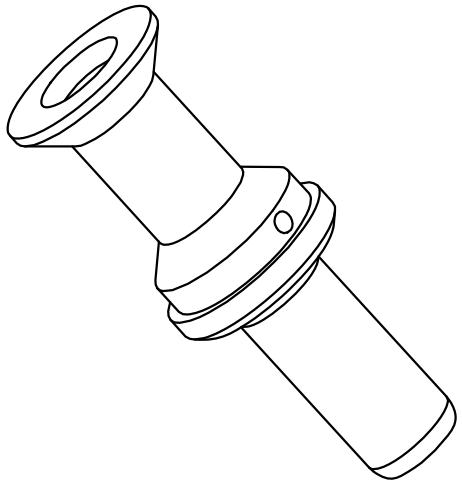


1		2		3	
产品代号 Part code	线径/Wire Gauge	D1	D2	D3	剥线长度 Stripping length
	mm ²				
CHSF200-25	25	10	7	9	22.5
CHSF200-35	35	12.5	8.2	10.2	22.5
CHSF200-50	50	14.5	10	12	22.5

REVISION DATA			
SYM	DESCRIPTION	DATE	APPROVED

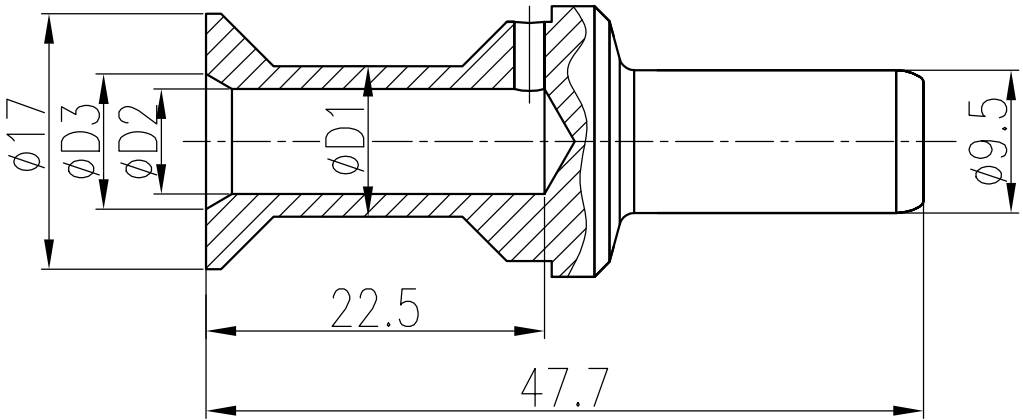

技术参数:
材料: 铜合金
表面处理: 镀银
额定电流: 200A
接触电阻: ≤0.3mΩ
线径范围: 25-50mm²
可插拔次数: ≥500

Contacts
Material: Copper alloy
Surface: hard-silver plated
Rated current: 200A
Contact resistance: ≤0.3mΩ
Crimp terminal
Wire gauge: 25-50mm²
Mechanical working life -mating cycles: ≥500

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OKERUI CONNECTOR CO., .LTD.		
0~≤6 ±0.03	DRAW			Size	A4			
6~≤20 ±0.06	DESIGN			Scale	1.5:1	PART NAME: CHSM200-XX (冷压公插针)		
20~≤50 ±0.10	CHECK			Sheet	1/1	Drawing NO.		REV
50~≤80 ±0.20	APPROVE			Proj.		Material		A