


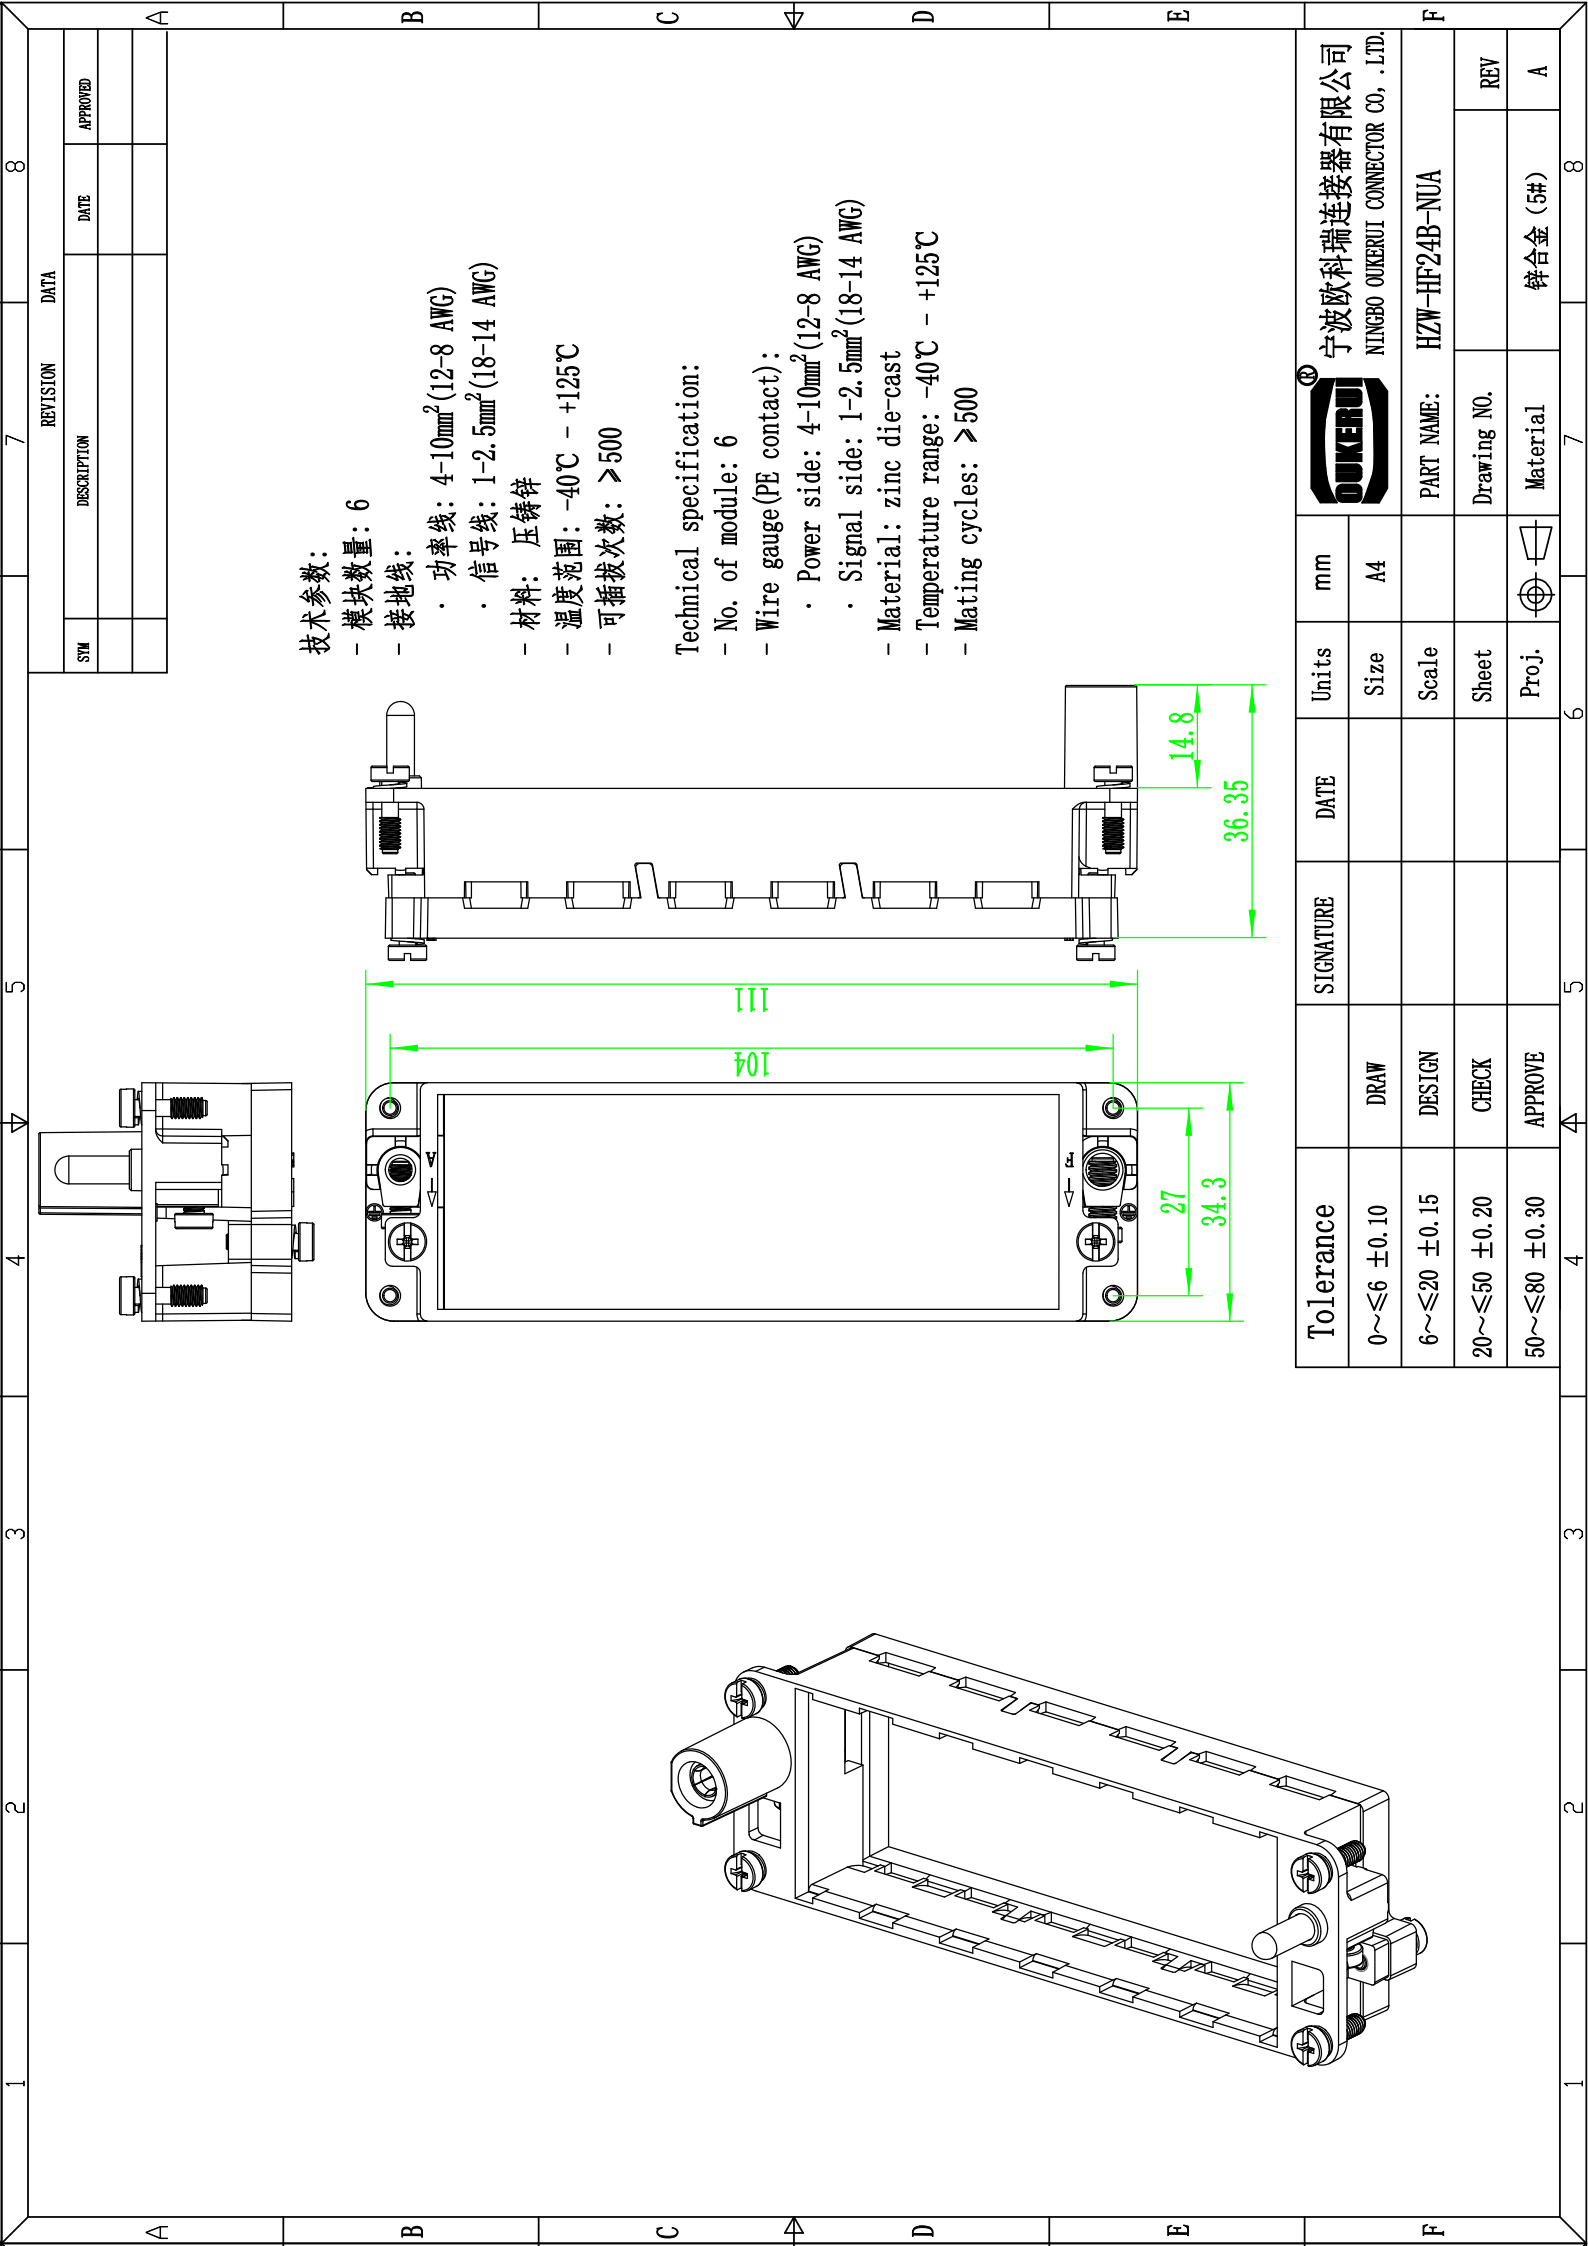

技术参数:

- 模块数量: 6
- 接地线:
 - 功率线: 4-10mm² (12-8 AWG)
 - 信号线: 1-2.5mm² (18-14 AWG)
- 材料: 压铸锌
- 温度范围: -40℃ - +125℃
- 可插拔次数: ≥500

Technical specification:

- No. of module: 6
- Wire gauge (PE contact):
 - Power side: 4-10mm² (12-8 AWG)
 - Signal side: 1-2.5mm² (18-14 AWG)
- Material: zinc die-cast
- Temperature range: -40℃ - +125℃
- Mating cycles: ≥500



宁波欧科瑞连接器有限公司
NINGBO OUKERUI CONNECTOR CO., .LTD.

Tolerance	SIGNATURE	DATE	Units	mm
0~≤6 ±0.10	DRAW		Size	A4
6~≤20 ±0.15	DESIGN		Scale	
20~≤50 ±0.20	CHECK		Sheet	
50~≤80 ±0.30	APPROVE		Proj.	

Part Name	Material	REV
HZW-HF24B-NUA	Material	REV
Drawing NO.		
Material		
Proj.		

SYN	DESCRIPTION	DATE	APPROVED